UNIVERSAL

R-STUDS 8.8

THREADED ROD FOR USE WITH BONDED ANCHORS IN VARIOUS SUBSTRATES

Threaded rod made of 8.8-grade structural steel. The rod is intended for construction applications where the transfer of high static loads is required. The rod's surface is protected with a zinc electroplated coating (ZP).



FEATURES AND BENEFITS


- The steel grade 8.8 provides enhanced tensile and shear strength for the rod
- Can be post-installed through fixture in some cases. (Consult technical advisory service).
- Zinc electroplated surface for enhanced corrosion resistance.
- Hexagonal head for convenient use with torque wrench.
- Flat head for quick manual installation without a setting tool.
- High quality workmanship.
- For use with all chemical anchors in the offer.

SUBSTRATES

- Cracked concrete
- Non-cracked concrete
- Clay block
- Aerated concrete
- Aerated concrete block
- Brick
- Hollow brick

R-STUDS 8.8

THREADED ROD FOR USE WITH BONDED ANCHORS IN VARIOUS SUBSTRATES

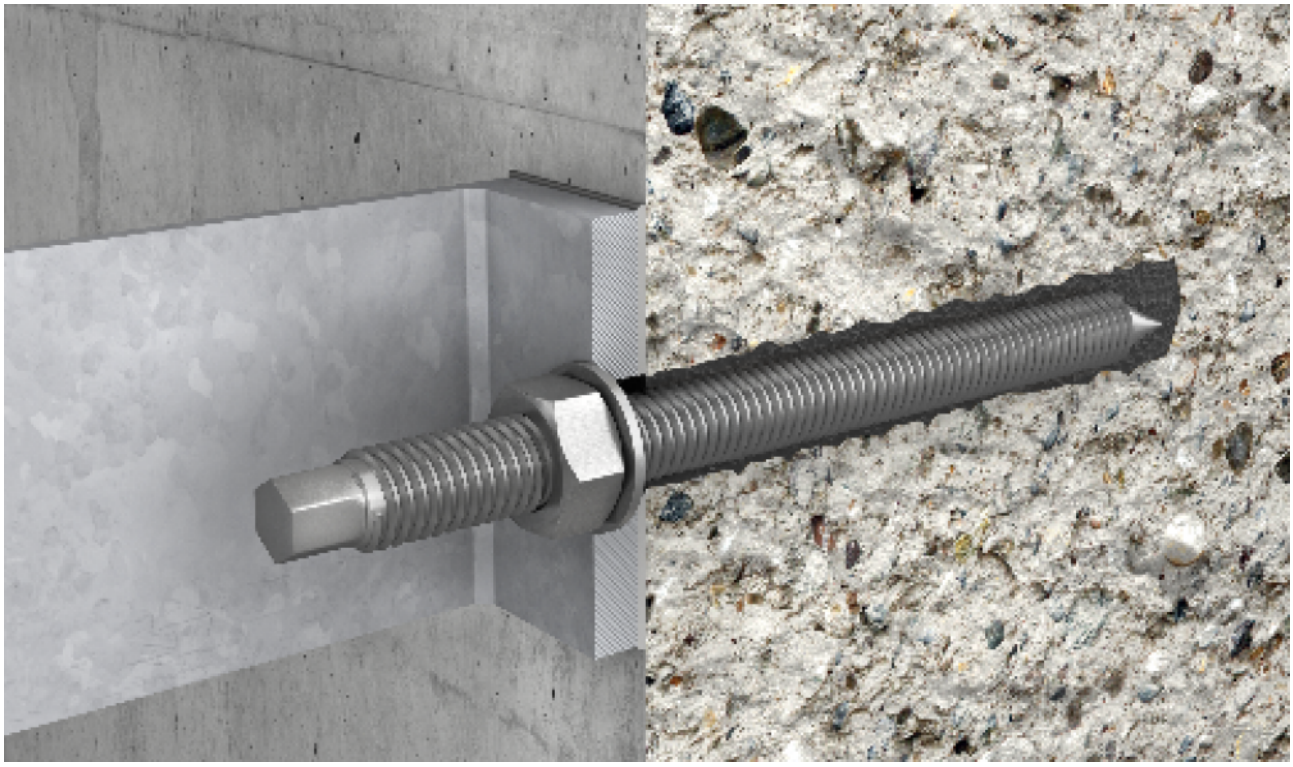

APPLICATIONS

- Anchoring glued in with threaded rods
- Barriers
- Boilers
- Ceiling mounts
- Elevators and escalators
- Pipelines
- Steel structures







Poland
S7 Expressway

R-STUDS 8.8

THREADED ROD FOR USE WITH BONDED ANCHORS IN VARIOUS SUBSTRATES



R-STUDS



R-STUDS-FL

SKU	Metric rods		
	Diameter	Length	Rod end
	d	L	-
	mm	mm	-
R-STUDS-08110-88	8	110	Hex
R-STUDS-10130-88	10	130	Hex
R-STUDS-12160-88	12	160	Hex
R-STUDS-12300-88	12	300	Hex
R-STUDS-16190-88	16	190	Hex
R-STUDS-16220-88	16	220	Hex
R-STUDS-16260-88	16	260	Hex
R-STUDS-16300-88	16	300	Hex
R-STUDS-20260-88	20	260	Hex
R-STUDS-20300-88	20	300	Hex
R-STUDS-24300-88	24	300	Hex
R-STUDS-30380-88	30	380	Hex
R-STUDS-16260-88FL	16	260	Flat
R-STUDS-20350-88FL	20	350	Flat
R-STUDS-30710-88FL	30	710	Flat

MECHANICAL PROPERTIES

Size			M8	M10	M12	M16	M20	M24	M30
Thread diameter	d	[mm]	8	10	12	16	20	24	30
Nominal ultimate tensile strength - tension	f_{uk}	[N/mm²]	800	800	800	800	800	800	800
Nominal yield strength	f_{yk}	[N/mm²]	640	640	640	640	640	640	640
Cross sectional area	A_s	[mm²]	36,6	58,0	84,3	156,7	244,8	352,3	560,6
Elastic section modulus	W_{el}	[mm³]	31,2	62,3	109,1	276,6	540,2	932,8	1872,1
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	30,0	60,0	105,0	266,0	519,0	898,0	1799,0

DESIGN PERFORMANCE DATA

Size			M8	M10	M12	M16	M20	M24	M30
TENSION LOAD, STEEL FAILURE									
Characteristic resistance	$N_{Rk,s}$	[kN]	29,0	46,0	67,0	125,0	196,0	282,0	448,0
Partial safety factor[1)]	γ_{MS}	[-]	1,50	1,50	1,50	1,50	1,50	1,50	1,50
SHEAR LOAD, STEEL FAILURE									
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	14,6	23,2	33,7	62,7	97,9	140,9	224,2
Partial safety factor[1)]	γ_{MS}	[-]	1,25	1,25	1,25	1,25	1,25	1,25	1,25

[1)] In the absence of other national regulation.

LOGISTICAL DATA

SKU	Base-sales unit	Unit pack	Bulk pack	Pallet	Single Package - Gross Weight	Bulk Package - Gross Weight	Palette - Gross Weight	Barcode
R-STUDS-08110-88	pcs.	10.0	10.0	5040.0	0.4	0.4	212.2	5906675076171
R-STUDS-10130-88	pcs.	10.0	10.0	9350.0	0.8	0.8	740.5	5906675076188
R-STUDS-12160-88	pcs.	10.0	10.0	5040.0	1.3	1.3	674.4	5906675076195
R-STUDS-12300-88	pcs.	10.0	10.0	1920.0	2.3	2.3	450.8	5906675401874
R-STUDS-16190-88	pcs.	10.0	10.0	2560.0	2.9	2.9	729.6	5906675076201
R-STUDS-16220-88	pcs.	10.0	10.0	2560.0	3.2	3.2	831.5	5906675060514
R-STUDS-16260-88	pcs.	10.0	10.0	1920.0	3.8	3.8	720.4	5906675555706
R-STUDS-16300-88	pcs.	5.0	5.0	960.0	2.2	2.2	425.9	5906675555713

R-STUDS 8.8

THREADED ROD FOR USE WITH BONDED ANCHORS IN VARIOUS SUBSTRATES

LOGISTICAL DATA

SKU	Base-sales unit	Unit pack	Bulk pack	Pallet	Single Package - Gross Weight	Bulk Package - Gross Weight	Palette - Gross Weight	Barcode
R-STUDS-20260-88	pcs.	5.0	5.0	1170.0	3.0	3.0	711.4	5906675076218
R-STUDS-20300-88	pcs.	5.0	5.0	440.0	3.5	3.5	309.6	5906675085562
R-STUDS-24300-88	pcs.	5.0	5.0	440.0	5.1	5.1	447.2	5906675076225
R-STUDS-30380-88	pcs.	2.0	2.0	500.0	3.9	3.9	980.5	5906675076232
R-STUDS-16260-88FL	pcs.	10.0	10.0		3.8	3.8		5906675437415
R-STUDS-20350-88FL	pcs.	1.0	1.0	286.0	0.8	0.8	241.7	5906675393742
R-STUDS-30710-88FL	pcs.	5.0	5.0		0.0	0.0		5906675487045

RELATED PRODUCTS

SAFETY

Protective gloves for power tools
R-PGL



DRILLING

Rotary Hammer Drill SDS plus; 850W; 26mm; 2.5J
R-PRH-26850



Cordless Hammer 18V SDS plus
R-PRH18



Drill bits Aggressor SDS plus
RT-SDSA



Drill bits Rebardrill SDS plus
RT-SDSR



CLEANING

Rigid extension R-BRUSH-TC for cleaning with SDS+ drive
R-BRUSH-EXT-H-SDS



Steel wire brushes for cleaning holes
R-BRUSH-TC



Blow Pump
R-BLOWPUMP



ANCHORING

Cordless RawlWrench 18V 315 Nm, in a transport case
R-PID18-315



Hammer
RT-HAM-0500

